


LED STREET LIGHT G SERIES

PARAMETER:

- λ **Type: LQ-SLG**
- λ **Light source: Lumiled SMD 3030 LED**
- λ **Driver: Optional (SOSEN , MW...)**
- λ **Color of the housing: grey**
- λ **Work voltage: AC(85V-305V)/(50-60HZ)**
- λ **Power factor(PF): >0.95**
- λ **Light efficiency: 130 lm/w**
- λ **Fixture efficiency: >90%**
- λ **View angle: 60.90 120°**
- λ **Color instruction: >70**
- λ **Color temperature(CCT): 3000/4000K/5000/5700/6500K**
- λ **Life time: >50,000 hrs**
- λ **CE certification**



PRODUCT DIMENSIONS:

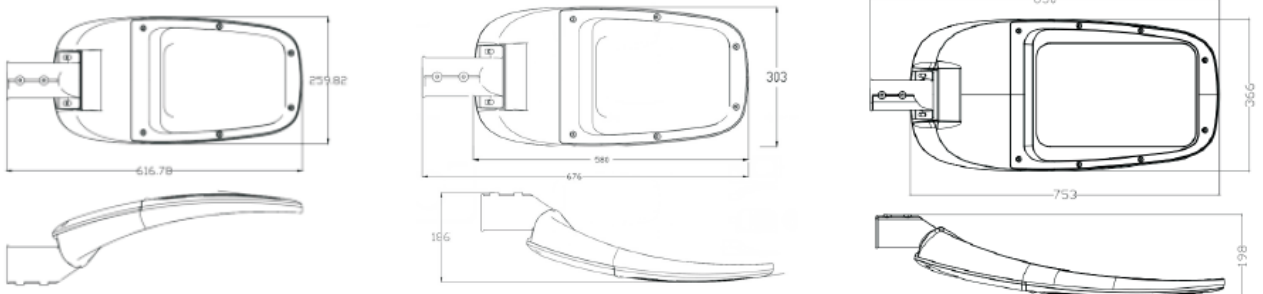



Shanghai Leiqiong Lighting Technology Co., LTD

Tel: 021-52716052 Fax:021-5271 6053

Web:www.better-led.com

Contacting: Ms Elaine Mail:Sales3@better-led.com

MODEL	L(mm)	W(mm)	H(mm)
LQ-SLG-MN-30W	507	210	143
LQ-SLG-MN-50W	507	210	143
LQ-SLG-S-60W	617	260	186
LQ-SLG-S-80W	617	260	186
LQ-SLG-S-100W	617	260	786
LQ-SLG-M-120W	676	303	186
LQ-SLG-M-150W	676	303	186
LQ-SLG-M-200W	676	303	186
LQ-SLG-L-240W	850	366	198
LQ-SLG-L-300W	850	366	198

SPECIFICATION :

Model	LQ-SLG-MN-30W	LQ-SLG-MN-50W	LQ-SLG-S-60W	LQ-SLG-S-80W	LQ-SLG-S-100W	LQ-SLG-M-120W	LQ-SLG-M-150W	LQ-SLG-M-200W	LQ-SLG-L-240W	LQ-SLG-L-300W
Power	30W	50W	60W	80W	100W	120W	150W	200W	240W	300W
LED	Lumileds 3030 LED									
LED QTY	36	72	96	128	192	180	240	360	336	448
Lumen Efficiency	130 lm/W									
CCT	2700-6500K									
CRI	70 (80 optional)									
Driver	Meanwell/Moso/Sosen....									
Dimming	0-10V /DALI /PWM / TIMMING for optional									



Shanghai Leiqiong Lighting Technology Co., LTD

Tel: 021-52716052 Fax:021-5271 6053

Web:www.better-led.com

Contacting: Ms Elaine Mail:Sales3@better-led.com

IP Rate	IP66
IK Rate	IK08
Working Temp.	-30 – 50 ° C
Certificate	CE ROHS ISO9001 2015
Option	Photocell / SPD / Long cable

PHOTOMETRIC RESULTS:

